

T-Series Extended Power Supply User Manual_V1.1 T-PS02



● Brief Introduction


This product is the extended power supply for T-Series video door phone system, it is mainly for power supply of rear system and video signal relay.

Bus interface includes Bus In, Bus Out and Bus Up.

● Function

- Over-voltage Protection
- Over-current Protection
- Over-heat Protection
- Short circuit Protection
- Lightning Protection
- Video Enhance: 2x amplification for differential video signal
- Audio turns on only under intercom and ringing state
- Data receiving and transmitting
- Provide power for rear system and isolation for front power supply
- Front system connected detection
- Impedance Matching

● Instruction

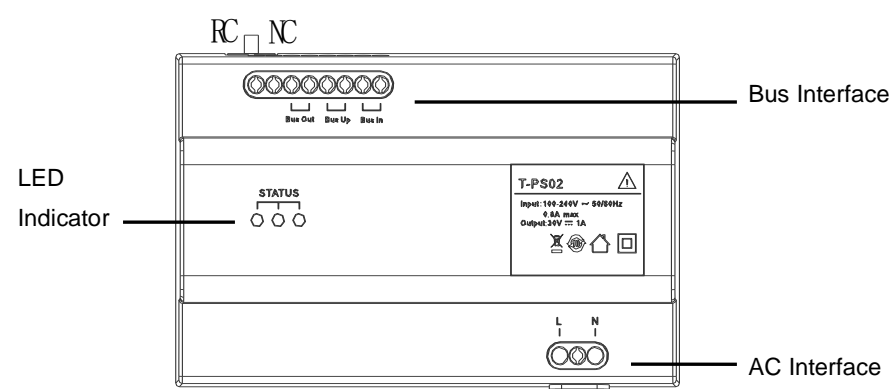

Wiring:
 AC: L connect to live wire, N connect to neutral wire (Voltage input please refer to Parameters).
 Bus Interface: Bus In, Bus Up, Bus Out.

LED Indicator:
 The red light on the left will Flash while Bus is over-current.
 The green light in the middle will be on while working, and flash while receiving data signal.
 The green light on the right will be on while front system is connected and working..

RC/ON NC/OFF:
 Switch turn to RC/ON means device is under Impedance Matching state.
 Switch turn to NC/OFF means device is not under Impedance Matching state.


Bus Interface:
 Bus In: Bus input.
 Bus Up: Connection for next Extended Power Supply.
 Bus Out: Output for amplified video signal.

● Parameters


No.	Name	Parameter
1	Input	Input Volt Range
2		Input Current
3		Input Freq. Range
4		No-load Power Consumption
5		Work Efficiency
6	Output	Output Volt.
7		Output Current
8	Protection	Over-Current Protection
9		Short Circuit Protection
10		Over-heat Protection
11		Lightning Protection
12	Environment	Work Temp
13		Storage Temp
14		Work & Storage Humidity

● Dimension Diagram

Dimension(LxWxD): 144x90x64mm

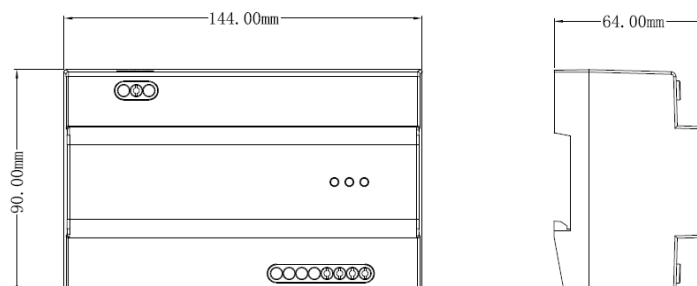


● Installation

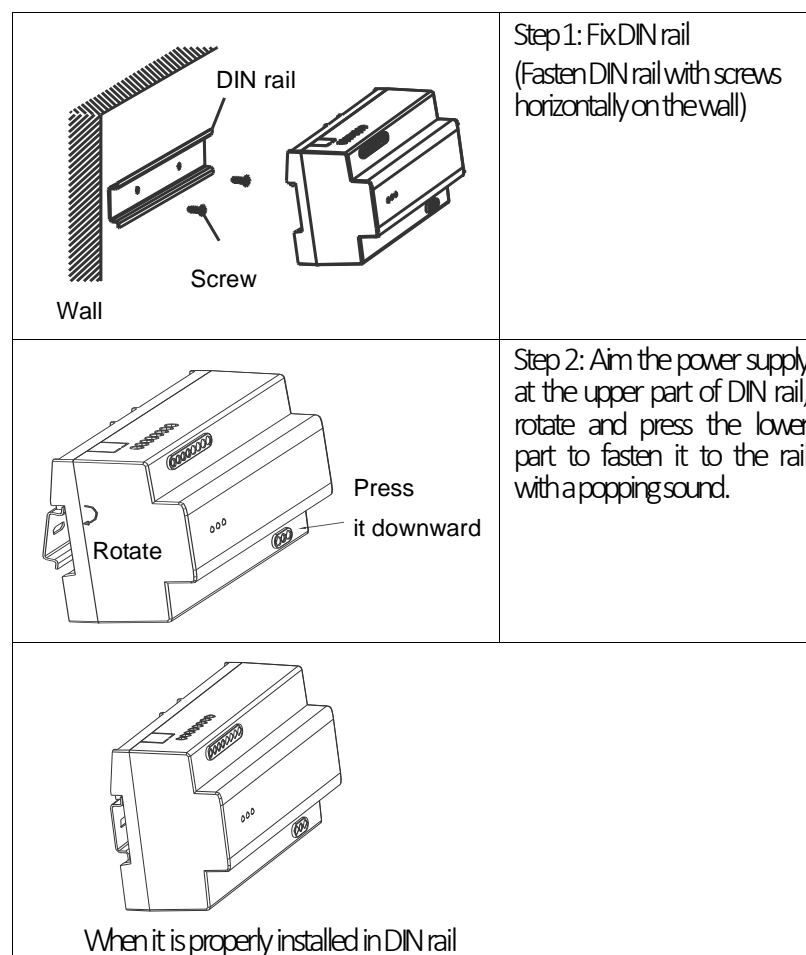

● Caution

1. Keep devices away from strong magnetic field, high-temp and wet environment
2. DONOT drop the device to the ground or make them hard impact
3. DONOT use wet cloth or volatile reagent to clean the device
4. DONOT disassemble the device without professional guidance
5. Avoid disposing metal part in ports to avoid electric shock
6. NO reverse wires in both input and output
7. NO reverse wires in Bus Interface (IN、OUT、UP)

Topology of T-series Extended Power Supply

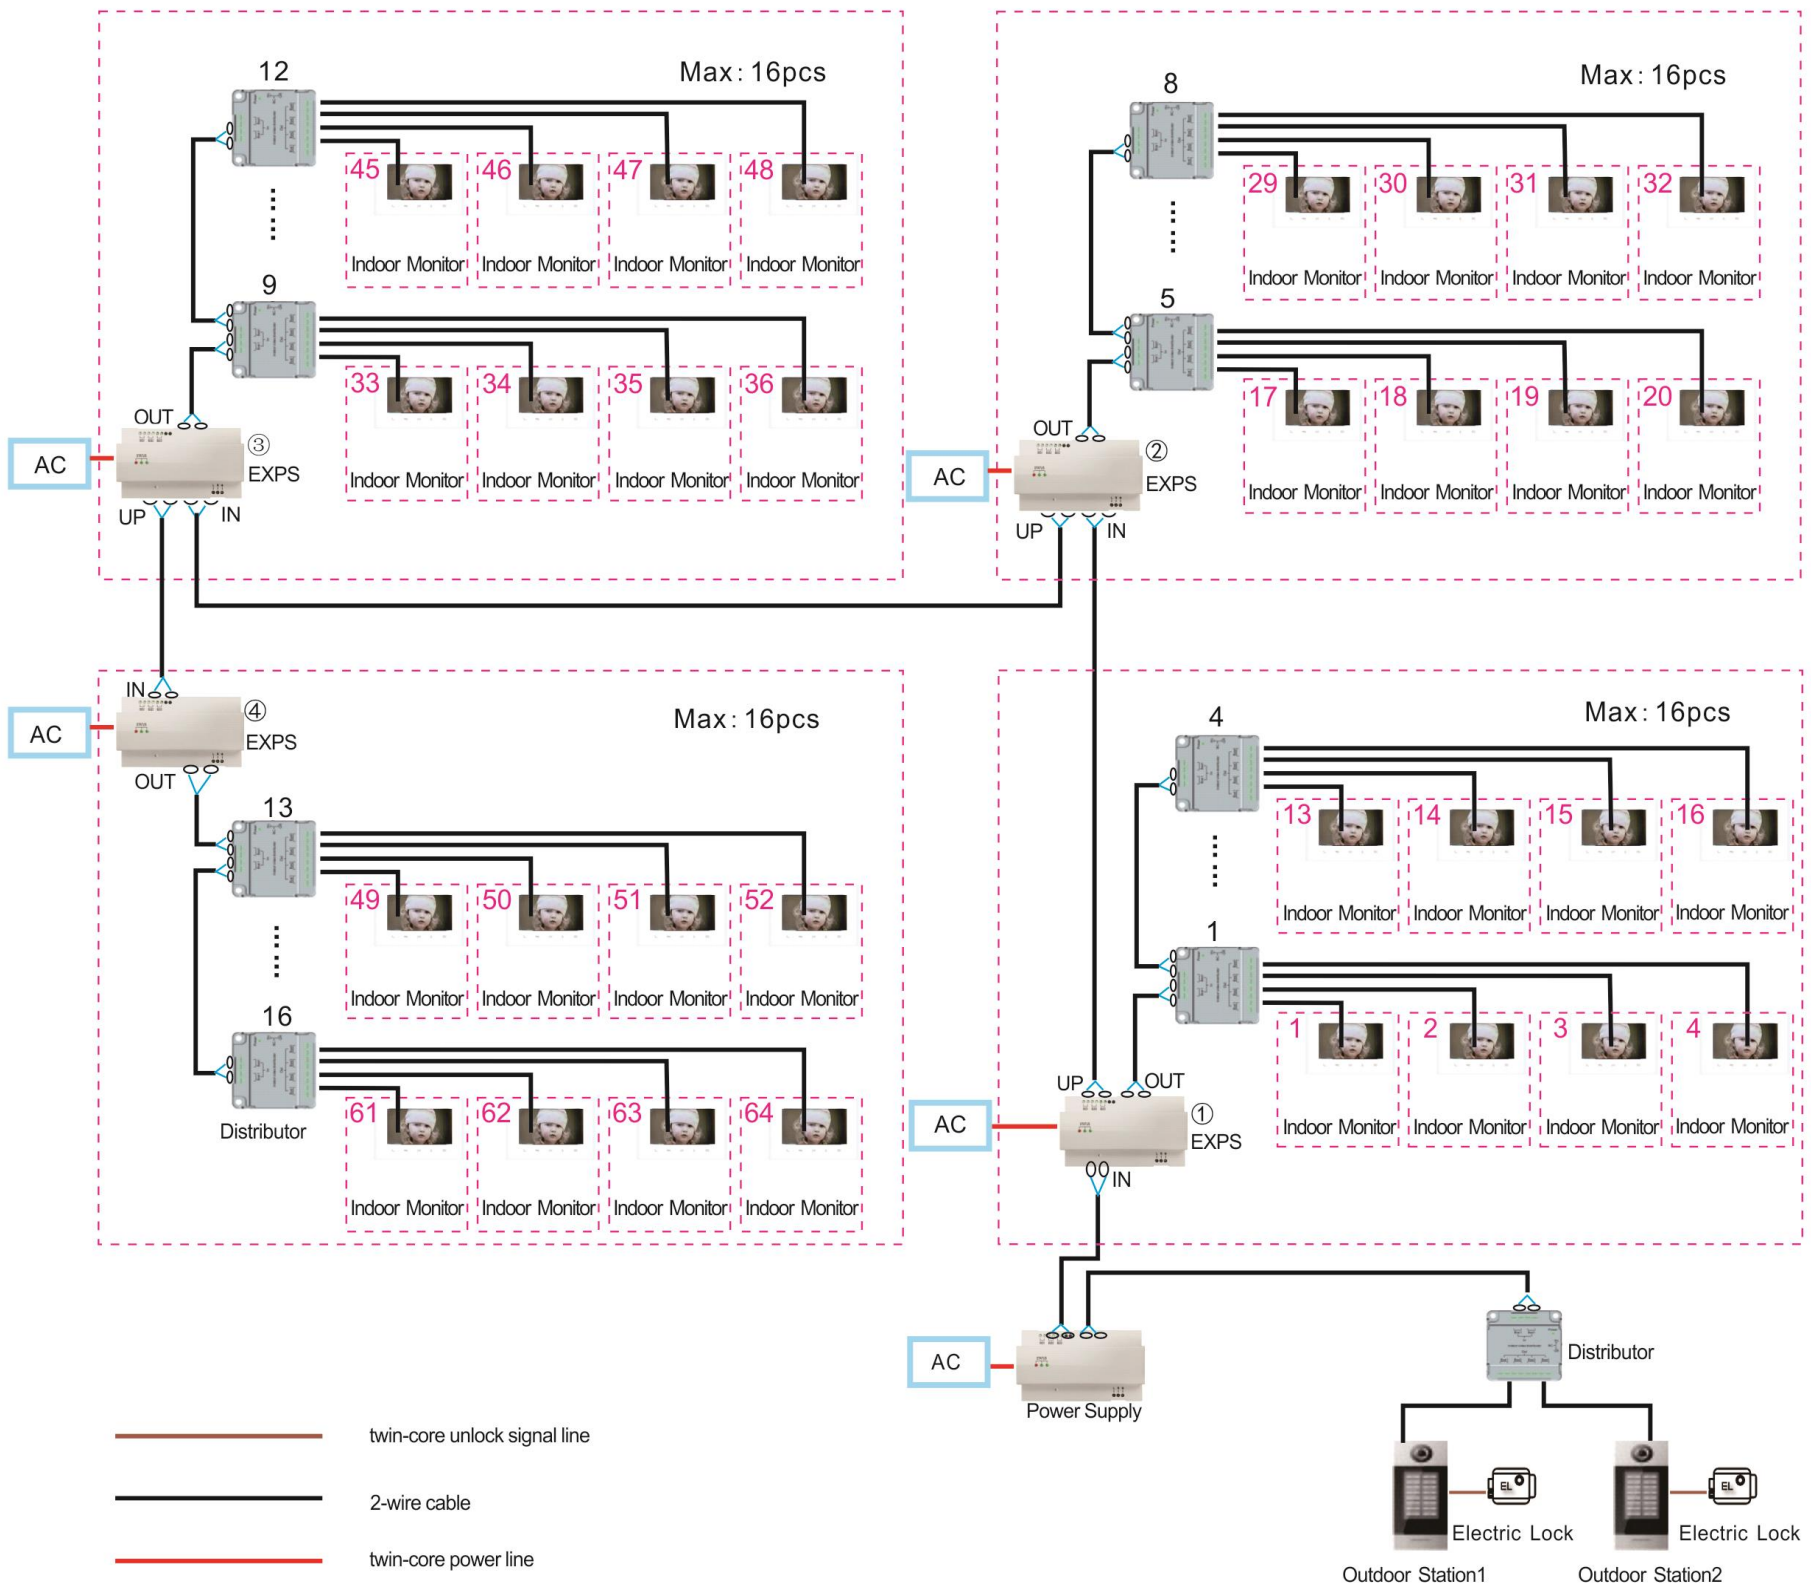

● Attention

1. Wiring for large system: Bus In of the first Extended Power Supply should be connected to System Power Supply, Bus Up to Bus In of the next Extended Power Supply, and Bus Out to Distributor, the specific wiring can refer to upper figure.
2. Each Extended Power Supply can support up to 16 Indoor Monitors, wiring for large system is suggested to find upper diagram for reference (System Power Supply only provide power for Outdoor Stations)
3. Wiring distance between 2 monitors which are using same Extended Power Supply should not exceed 15m, wiring distance between Distributor and Indoor Monitor should not exceed 5m.
4. A Distributor should be added if the wiring distance between 2 Extended Power Supply exceeded 40m.
5. A Hub should be added if it has more than 1 Outdoor Station within the system.
6. Wiring distance between Outdoor Station and Indoor Monitor should not exceed 150m.
7. Impedance Matching should turn on if any following scenario happens:
 - If Bus Up of terminal Extended Power Supply doesn't cascade to rear system, Impedance Matching should turn on (Extended Power Supply ④ should set RC/ON as in upper figure).
 - If terminal Distributor doesn't cascade to rear system, Impedance Matching should turn on (Distributor 4, 8, 12, 16 should set RC/ON as in upper figure).
 - If terminal Indoor Monitor doesn't cascade to other Indoor Monitor hand in hand, Impedance Matching should turn on (all Indoor Monitors should set RC/ON as in upper figure), If cascade to other Indoor Monitors, the last Indoor Monitor should set RC/ON.